



SDR4A SERIES ANGLE DRILLS

**Full Line of Angle Drills for your
Production Needs**






SDR4A33S8L

Features:

- 5 Head Types – *Head for Every Job*
- 7 speeds – *Right Speed for Material and Diameter*
- 0.4 hp motor – *33% More Power*
- 3 Planetary Gears – *Long Life*
- Spiral Bevel Angle Gears – *Long Life*
- Integrated Rubber Grip – *Control and Ergonomics*
- Two-Finger Safety Lever – *Safety and Control*
- Drop-in Motors – *Ease of Maintenance*

Head Dimensions (in.)

Head Type	Accessory SKU	A	B	C
Standard 90°	SP75990	3.04	1.11	0.71
Compact 90°	SP76006	3.02	0.88	0.67
Heavy Duty 90°	SP76002	3.31	1.08	0.97
45°	SP75994	3.34	1.11	0.72
360°	SP76008	3.44	3.14	0.71

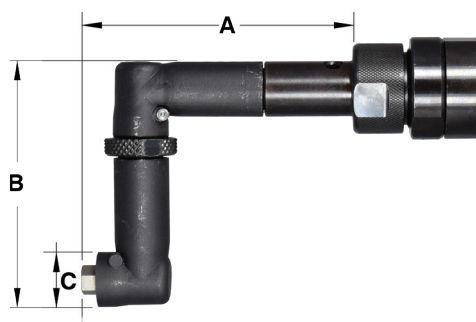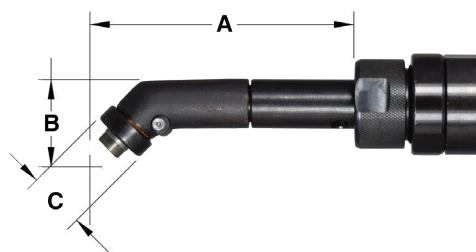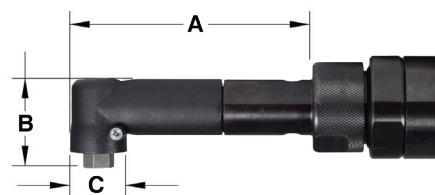

SDR4A SERIES ANGLE DRILLS



Angle Drills & Sealant Removal Kits



Model Number	Free Speed	Weight		Length		Side to Center		Air Consumption Free Speed		Spindle Internal Thread
	rpm	lb	kg	in	mm	in	mm	cfm	l/s	
90° Standard Angle Head – 0.4 hp (0.30 kW)										
SDR4A8S8L	800	2.1	0.94	10.0	255	0.35	8.9	21	10	1/4"-28
SDR4A20S8L	2000	1.9	0.87	9.5	240	0.35	8.9	21	10	1/4"-28
SDR4A27S8L	2700	1.9	0.87	9.5	240	0.35	8.9	21	10	1/4"-28
SDR4A33S8L	3300	1.9	0.87	9.5	240	0.35	8.9	21	10	1/4"-28
SDR4A44S8L	4400	1.9	0.87	9.5	240	0.35	8.9	21	10	1/4"-28
SDR4A55S8L	5500	1.9	0.87	9.5	240	0.35	8.9	21	10	1/4"-28
SDR4A27S9L	2700	1.9	0.87	9.5	240	0.35	8.9	21	10	9/32"-40
90° Compact Angle Head – 0.4 hp (0.30 kW)										
SDR4A28C8L	2800	1.9	0.84	9.5	240	0.33	8.4	21	10	1/4"-28
SDR4A35C8L	3500	1.9	0.84	9.5	240	0.33	8.4	21	10	1/4"-28
SDR4A47C8L	4700	1.9	0.84	9.5	240	0.33	8.4	21	10	1/4"-28
SDR4A57C8L	5700	1.9	0.84	9.5	240	0.33	8.4	21	10	1/4"-28
90° Heavy Duty Angle Head – 0.4 hp (0.30 kW)										
SDR4A8H8L	800	2.2	0.99	10.3	260	0.49	12.4	21	10	1/4"-28
SDR4A13H8L	1300	2.2	0.99	10.3	260	0.49	12.4	21	10	1/4"-28
SDR4A21H8L	2100	2.0	0.92	9.8	250	0.49	12.4	21	10	1/4"-28
SDR4A28H8L	2800	2.0	0.92	9.8	250	0.49	12.4	21	10	1/4"-28
SDR4A35H8L	3500	2.0	0.92	9.8	250	0.49	12.4	21	10	1/4"-28
45° Angle Head – 0.4 hp (0.30 kW)										
SDR4A8F8L	800	2.0	0.92	10.3	260	0.36	9.1	21	10	1/4"-28
SDR4A21F8L	2100	1.9	0.85	9.8	250	0.36	9.1	21	10	1/4"-28
SDR4A28F8L	2800	1.9	0.85	9.8	250	0.36	9.1	21	10	1/4"-28
SDR4A35F8L	3500	1.9	0.85	9.8	250	0.36	9.1	21	10	1/4"-28
SDR4A47F8L	4700	1.9	0.85	9.8	250	0.36	9.1	21	10	1/4"-28
SDR4A57F8L	5700	1.9	0.85	9.8	250	0.36	9.1	21	10	1/4"-28
SDR4A28F9L	2800	1.9	0.85	9.8	250	0.36	9.1	21	10	9/32"-40
360° Swivel Head – 0.4 hp (0.30 kW)										
SDR4A18T8L	1800	2.1	0.97	10.0	265	0.35	8.9	21	10	1/4"-28
SDR4A29T8L	2900	2.1	0.97	10.0	265	0.35	8.9	21	10	1/4"-28
SDR4A48T8L	4800	2.1	0.97	10.0	265	0.35	8.9	21	10	1/4"-28
Sealant Removal Kit with 90° & 45° Head – 0.4 hp (0.30 kW)										
SDR4A8SF-SRK	800	2.1	0.94	10.0	255	0.35	8.9	21	10	1/4"-28
Sealant Removal Kit with 45° Head – 0.4 hp (0.30 kW)										
SDR4A8F-SRK	800	2.0	0.92	10.0	260	0.36	9.1	21	10	1/4"-28
Sealant Removal Kit with 90° Head – 0.4 hp (0.30 kW)										
SDR4A8S-SRK	800	2.1	0.94	10.0	255	0.35	8.9	21	10	1/4"-28

General: Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm)

Performance rated @ 90 psig (6.2 bar) air pressure

Standard Equipment: Parts List • Safety and Instruction Manual



SDR4A33S8L



SDR4A35C8L



SDR4A13H8L



SDR4A28F8L



SDR4A29T8L



SDR4A8SF-SRK

siouxtools.com



250 Snap-on Drive
P.O. Box 1596
Murphy, North Carolina USA 28906
PH: 828.835.9765
FAX: 828.835.9685
TOLL FREE: 866.259.7291
TOLL FREE FAX: 800.722.7236

Belgium
Tel.: 32 (0)14 23 19 67
Fax: 32 (0)14 23 26 27
Email: Industrial.be@snapon.com

Netherlands
Tel.: 31 (0)88 0104000
Fax: 31 (0)88 0104010
Email: Industrial.nl@snapon.com

Latin America
Tel.: 786-254-7765
Fax: 786-534-9350
e-mail: latinamerica.caribbean@snapon.com

Germany
Tel.: 49 2104 9509-0
Fax: 49 2104 9509-99
e-mail: indus.germany@snapon.com

Italy
Tel.: 00 39 02 66 04 53 70
Fax: 00 39 02 61 29 78 15
e-mail: indus.italia@snapon.com

United Kingdom
Tel.: 44 (0) 1536-413904
Fax: 44 (0) 1536-413874
e-mail: industrialuk@snapon.com

Asia
Tel.: 65-6451-5570
Fax: 65-6451-5574
e-mail: esales.sg@snapon.com

Australia
Tel.: 61 2 9837 9100
Fax: 61 2 9624 2578
e-mail: SOTA.customerservice@snapon.com